


BIPRO

TD6G72M **144-cell**

430 ~ 450W

bifacial dual glass
9BB half-cut mono perc

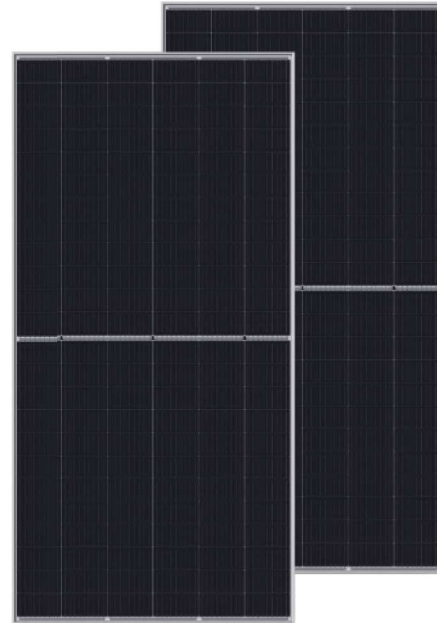

KEY FEATURES



9BB half-cut cell technology

New circuit design, lower internal current, lower Rs loss



Industry leading high yield

Bifacial PERC cell technology,
5%-25% more yield depends on different conditions



Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



Wider application

No water-permeability and high wear-resistance,
can be widely used in high-humid, windy and dusty area



IP68 junction box

High waterproof level

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001 : 2015 Quality Management System
- ISO 14001 : 2015 Environment Management System
- ISO 45001 : 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY

12 years
Quality
insurance

30 years
Power output
guarantee

- Bifacial Dual Glass Mono Solar Module Linear Performance Warranty
- Conventional Mono Solar Module Linear Performance Warranty

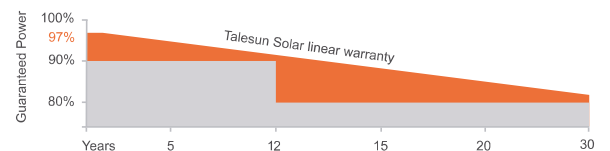

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 - +3%)

Maximum Power(Pmax/W)	430	435	440	445	450
Operating Voltage(Vmpp/V)	41.2	41.4	41.6	41.8	42.0
Operating Current(Imp/A)	10.44	10.51	10.58	10.65	10.72
Open-Circuit Voltage(Voc/V)	49.6	49.8	50.0	50.2	50.4
Short-Circuit Current(Isc/A)	11.09	11.16	11.22	11.29	11.36
Module Efficiency ηm(%)	19.3	19.5	19.7	19.9	20.2

Performance at NMOT

Maximum Power(Pmax/W)	402.5	407.2	411.9	416.6	421.4
Operating Voltage(Vmpp/V)	38.8	39.0	39.2	39.4	39.6
Operating Current(Imp/A)	10.37	10.44	10.51	10.58	10.65
Open-Circuit Voltage(Voc/V)	47.0	47.2	47.4	47.6	47.8
Short-Circuit Current(Isc/A)	11.18	11.25	11.31	11.38	11.45

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

Electrical characteristics with different rear side power gain (reference to 440W front)

Pmax gain	Pmax/W	Vmpp/V	Imp/A	Voc/V	Isc/A
5%	462.1	41.6	11.11	50.0	11.78
10%	484.1	41.6	11.64	50.0	12.34
15%	506.1	41.6	12.17	50.0	12.90
20%	530.7	41.8	12.70	50.2	13.46
25%	552.8	41.8	13.23	50.2	14.03

MECHANICAL SPECIFICATION

Cell Type	Half-cell 9 busbar
Cell Dimensions	166 * 166mm(6inches)
Cell Arrangement	144 (6*24)
Weight	26.8kg
Module Dimensions	2132*1048*30mm
Cable Length	300/300mm (11.81/11.81inches)
Cable Cross Section Size	4mm ² (0.006inches ²)
Front Glass	2.0mm (0.08inches) AR Coated Heat Strengthened Glass
Back Glass	2.0mm (0.08inches)Heat Strengthened Glass (White Grid Glass)
No.of Bypass Diodes	3/6
Packing Configuration	A: 35pcs/Pallet, 700pcs/40hq
Frame	30 mm (1.18 inches) Anodized Aluminium Alloy
Junction Box	IP68


OPERATING CONDITIONS

Maximum System Voltage	1500V/DC(IEC)
Operating Temp	-40°C~+85°C
Maximum Series Fuse	20A
Static Loading	5400pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	MC4 Compatible
Backside Output Ratio*	>75%
*Under STC: Backside Output Ratio = $P_{\max(\text{rear})} / P_{\max(\text{front})}$	

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C

I-V CURVE

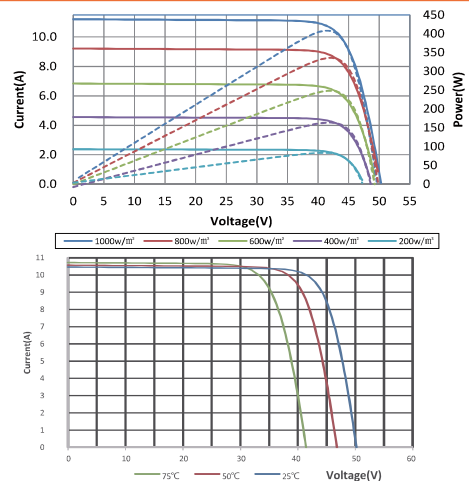

TECHNICAL DRAWINGS

